

ANALYTICAL APPARATUS**Publication number:** JP2001504582T**Publication date:** 2001-04-03**Inventor:****Applicant:****Classification:**

- International: **G01N21/64; G01N21/27; G01N21/55; G01N33/543; G01N21/64; G01N21/25; G01N21/55; G01N33/543; (IPC1-7): G01N21/27; G01N33/543**

- European: **G01N21/55B2**

Application number: JP19980523306T 19971105

Priority number(s): GB19960023820 19961116; WO1997GB03037 19971105

Also published as:

WO9822808 (A1)
EP0938661 (A1)
US6268125 (B1)
ZA9709734 (A)
EP0938661 (A0)


more >>

Report a data error here

Abstract not available for JP2001504582T

Abstract of corresponding document: **WO9822808**

A surface plasmon resonance apparatus for detecting a soluble analyte (e.g. a protein) or a particulate analyte (e.g. a cell), the apparatus comprising: (a) a sensor block adapted to receive a sensor, said sensor, for example a sensor slide, having a metallised sensor surface capable of binding the analyte; (b) a light source capable of generating an evanescent wave at the sensor surface of a sensor slide on the sensor block; (c) a first detector capable of detecting light from the light source which is internally reflected from the sensor surface; and (d) a second detector (e.g. a video camera) capable of detecting light scattered or emitted from an analyte bound thereto. Optionally the apparatus further comprises a second light source for increasing the intensity of the light scattered or emitted from an analyte bound to the sensor surface, preferably this is sited to such as to minimise the amount of light transmitted therefrom which is detected by the first detector. Also disclosed are sensors adapted for use in the apparatus, and methods of detecting analytes in samples comprising exposing samples to the sensor surface of the apparatus.

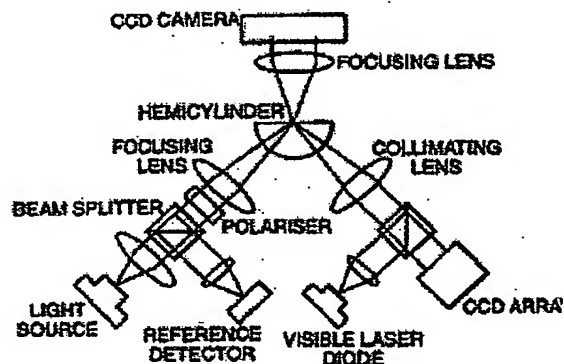

Data supplied from the esp@cenet database - Worldwide